

**(19) World Intellectual Property Organization**  
International Bureau



**(43) International Publication Date**  
**20 June 2002 (20.06.2002)**

**PCT**

(10) International Publication Number  
**WO 02/48779 A2**


- (51) International Patent Classification<sup>7</sup>: G02C 7/04
- (21) International Application Number: PCT/US01/47090
- (22) International Filing Date:  
13 November 2001 (13.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/713,461 15 November 2000 (15.11.2000) US
- (71) Applicant: JOHNSON & JOHNSON VISION CARE, INC. [US/US]; 7500 Centurion Parkway, Suite 100, Jacksonville, FL 32256 (US).
- (72) Inventor: JUBIN, Philippe; 5407 Stetson Road, Jacksonville, FL 32207 (US).
- (74) Agents: JOHNSON, Philip, S. et al.; Johnson & Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: METHOD FOR DESIGNING CONTACT LENSES

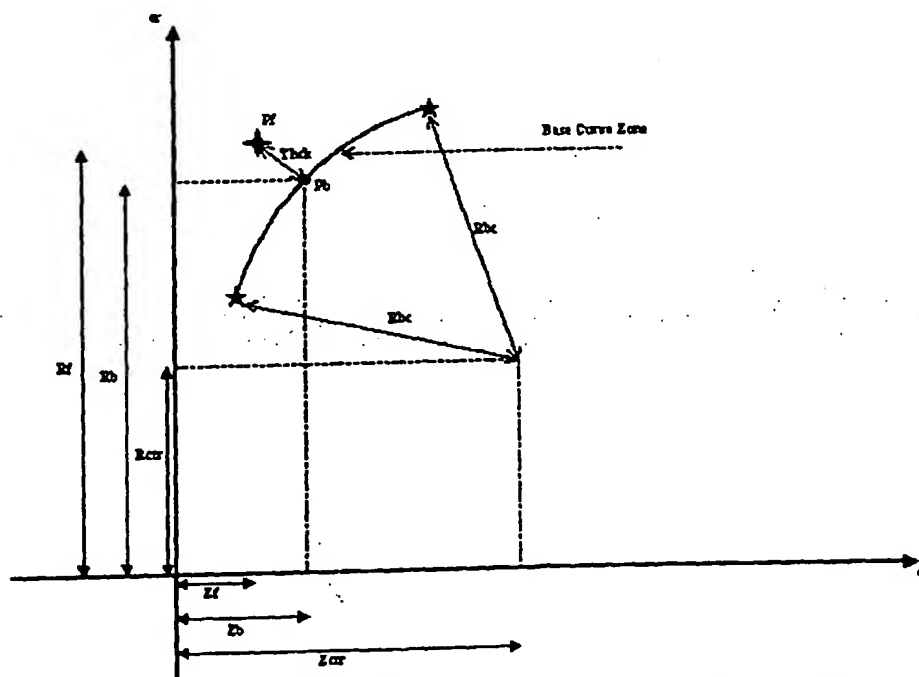

(57) Abstract: The invention provides methods for designing contact lenses in which method the thickness in the lens periphery is precisely controlled.

**WO 02/48779 A2**

## METHOD FOR DESIGNING CONTACT LENSES

5

### Field of the Invention

The invention relates to methods for designing contact lenses. In particular, the invention provides a method for designing contact lenses in which the thickness in the lens periphery is precisely controlled.

10

### Background of the Invention

The use of contact lenses for purposes of visual acuity correction and cosmetics is well known. It is important in the design of a contact lens to provide for good handling, comfort, centration, and orientation of the lens. Each of these lens characteristics is dependent to a large extent on the thickness profile of the lens periphery.

15

Conventional methods for controlling the thickness of the lens periphery include the use of one or more of lenticular zones, bevels, chamfers, and the like. However, these methods do not provide precise control of the thickness differential of the lens periphery. Additionally, these methods do not provide a means for designing a non-rotationally symmetric lens. Therefore, a need exists for a method for designing contact lenses that overcomes these disadvantages.

20

25

### Brief Description of the Drawings

Fig. 1 is a depiction of a coarse mesh used in the method of the invention.  
Fig. 2 is a graph of the thickness variations of several parallels of Fig. 1.  
Fig. 3 is a depiction of intersection points of the mesh of Fig. 1 and a point falling between the parallels and meridians of that mesh.

30

Fig. 4 is a graph for use in the method of the invention.

### Detailed Description of the Invention and Preferred Embodiments

5       The invention provides a method, and lenses produced using the method, for designing articles, preferably ophthalmic lenses, in which the thickness of the periphery may be precisely controlled. Thus, the method provides for precise control of the thickness differential of the periphery and the location of the differential on the periphery. Finally, the method provides a ready means for  
10   designing non-rotationally symmetric articles.

          In a preferred embodiment, the invention provides a method for designing an ophthalmic lens, the method comprising, consisting essentially of, and consisting of:  
15   a.) generating a thickness map for at least a portion of the periphery of the lens; and  
     b.) deriving a geometry for at least a portion of the lens periphery from the thickness map. In another preferred embodiment, the invention provides an ophthalmic lens produced by this method.

          By "ophthalmic lens" is meant a spectacle lens, contact lens, intraocular lens,  
20   onlay lens, or the like. Preferably, the lens designed using the method of the invention is a contact lens. For purposes of the invention, by "lens periphery" or "periphery of the lens" is meant the portion of the lens that is outside of the optic zone.

25       For the lens of the invention, the optical properties of its base curve and optical zones may be designed in any conventional manner. The base curve and optical curve may be described in any manner, as long as for a given diameter  $D$  on the base curve, the corresponding sag value  $S$  may be derived.

In a preferred method, at least a portion of, and preferably all of, the lens periphery is first described using parallels and meridians, as shown in Fig. 1, to  
 5 define a coarse mesh. The location of all of the intersecting points of the mesh are recorded as Cartesian, cylindrical, or spherical coordinates and stored in arrays. The greater the number of points used, the greater will be the precision for controlling the lens periphery thickness.

10 Further, the intersecting points are divided into at least three families of arrays: optic zone array points that are located at the innermost border of the periphery; exterior array points that are located at the outermost border of the periphery; and mid-array points that are located between the inner and outermost array points. In Fig. 1 is depicted representative members of each of these arrays.

15 The thickness differential or, preferably, the thickness variation then is defined for each parallel of the mesh. Preferably, this is carried out by one of two methods. First, a set of functions may be used to define the thickness variation along each parallel. The variations may be a function of any or all of the Cartesian, cylindrical, and spherical functions. For example, the variation may be a function of  
 20 the angle of rotation  $\theta$ . Referring to Fig. 2, the lens thickness along three parallels is shown. The function may be of any form. Preferably, the function is selected so that it creates a smooth surface, provides the means for creating non-axisymmetric lenses with thin zones for better centering, and is reasonably easy to visualize.

25 Suitable functions include, without limitation, functions of the following form

$$\text{Lens Thickness} = A \cdot \cos(\theta) + B$$

Lens Thickness =  $A \cdot \cos(B\theta + C) + D$ , wherein A is the maximum thickness differential in each parallel and D is the thickness at  $\theta - 90^\circ$

$$\text{Lens Thickness} = A \cdot \cos^2(B \cdot \theta + C) + D \cdot \sin^2(E \cdot \theta + C)$$

Lens Thickness =  $A * |\cos(B * \theta + C)| + D$ , for  $\theta = [0, \pi]$

Lens Thickness =  $A * (1 + |\sin \theta|)$ , for  $\theta = ]\pi, 2\pi[$

5

The number of functions that need to be defined are equal to  $N_r$ , or the number of parallels. One ordinarily skilled in the art will recognize that, in addition to trigonometric functions, any suitable function may be used including, without limitation, exponential, series, logarithmic, polynomial, step functions, and the like.

10 Preferably, trigonometric functions are used and more preferably trigonometric functions are used in conjunction with step functions. Alternatively, the thickness variations may be defined manually at every point. In this method, the thickness of the lens at every point is specified. However, this method is disadvantageous because it is cumbersome. The resulting thickness for each intersection point, the

15 number of points which equals  $N_r * N_\theta$  wherein  $N_\theta$  is the number of meridians, is calculated and recorded.

In the second step of the method, a geometry of the lens periphery is derived from the thickness map. This step is carried out by first refining the coarse mesh to

20 the desired accuracy in order to define the lens periphery more precisely. The refined, or fine, mesh describes the same lens geometry, but uses a greater number of points than does the coarse mesh. For example, referring to Fig. 1, the coarse mesh has  $N_r * N_\theta$  intersection points, or 60. In the fine mesh, there may be, for example, 3600 points. The precise number of points used will be determined by

25 balancing the use of as many points as possible to obtain a better lens definition against the computation time and storage space required for the information along with the fact that the lathes used to cut the tools for the lens may not be able to cut with the level of accuracy necessary for a large number of points.

30 The thickness and coordinates of the coarse mesh points are used to derive the thickness and z coordinates of the fine mesh points. For fine mesh points located

on one of the parallels, the function corresponding to the parallel is used to derive the thickness of that point. For fine mesh points falling on one of the meridians, an approximation is used to derive the lens thickness. Suitable approximations may be made by selecting a function type and from that function type, deriving the curve that best fits the data points. Examples of useful function types include, without limitation, polynomial function, conic functions, exponential functions, rational functions, logarithmic functions, trigonometric functions, and the like. Additionally and preferably, cubic spline approximations, or a series of special polynomials, may be used.

In the case of a fine mesh point that falls between the meridians and parallels, adjacent points falling on the parallels and meridians may be used to determine the fine mesh point's properties. Referring to Fig. 3, points n1 through n4 are shown along with fine mesh point P. The distance between N1 through n4 to point P is d1, d2, d3, and d4, respectively. The thickness at point P may be calculated by any suitable method including, without limitation, the use of bilinear interpolation, bicubic interpolation, bicubic splines, and the like. A quick, but crude method is as follows:

$$T(P) = (w1 * T(n1) + w2 * T(n2) + w3 * T(n3) + w4 * T(n4))$$

wherein T is thickness and where  $\text{SumD} = d1 + d2 + d3 + d4$ , and

$$w1 = [1 - d1 / \text{SumD}] / 3$$

$$w2 = [1 - d2 / \text{SumD}] / 3$$

$$w3 = [1 - d3 / \text{SumD}] / 3$$

$$w4 = [1 - d4 / \text{SumD}] / 3$$

Alternatively, a three-dimensional cubic spline approximation may be used to approximate the location of the fine mesh points. Three-dimensional cubic spline

approximations and their use are described in *Numerical Recipes in Fortran 77: The Art of Scientific Computing*, Cambridge Press (1996).

5        Once the thickness is calculated for all of fine mesh points, the z coordinates (or p for spherical coordinates) may be derived. Referring to Fig. 4, an example for a spherical base curve zone is shown. In Fig. 4, Pf(Zf, Rf) is the point on the front surface for which the z coordinate is to be derived, Rbc is the base curve radius, and (Zctr, Rctr) are the coordinates of the center of the base curve and Thck is the  
10    thickness at Pf. Zf is found using the following formula:

$$Zf = Zctr \pm \sqrt{(Rbc + Thck)^2 - (Rf - Rctr)^2}$$

15        In the case in which the base curve is non-spherical, the procedure may be more complicated, but may be summarized as follows: a.) offset the base curve by Thck; b.) intersect the offset curve with line  $r = Rf$ , wherein  $r = Rf$  is an equation for a line containing all of the points with y-coordinate Rf in a Cartesian coordinate system; and c.) select the correct solution if there are more than one solutions. One  
20    ordinarily skilled in the art will recognize that the correct solution will depend on the form of the equation of the offset curve.

25        In this way, all or a portion of the geometry of the lens periphery may be fully described as a point cloud. The lens periphery designed according to the method of the invention may be used in the design of any type of ophthalmic lens, but preferably is used in designing contact lenses and more preferably contact lens that are spherical, multifocal, toric, or combinations thereof. However, the method may find its greatest utility in the design of toric contact lenses.

What is claimed is:

- 5 1. A method for designing an ophthalmic lens comprising the steps of: a.) generating a thickness map for at least a portion of the periphery of the lens; and b.) deriving a geometry for at least a portion of the lens periphery from the thickness map.
- 10 2. The method of claim 1, wherein the lens is a contact lens.
3. The method of claim 2, wherein the lens is a non-rotationally symmetric lens.
- 15 4. The method of claim 2, wherein step a.) further comprises:
  - i.) describing at least a portion of the lens periphery using a plurality of parallels and meridians to define a coarse mesh;
  - ii.) recording intersection points of the parallels and meridians as one of Cartesian, cylindrical, or spherical coordinates; and
  - 20 iii.) defining a thickness variation for each of the plurality of parallels; and calculating a thickness for each intersection pointand step b.) further comprises refining the coarse mesh by deriving coordinates and thicknesses for a plurality of points in addition to the intersection points of the coarse mesh.
- 25 5. The method of claim 4, wherein substep iii.) is carried out by defining a thickness variation using a function selected from the group consisting of trigonometric, exponential, series, logarithmic, polynomial, and step functions, and combinations thereof.



6. The method of claim 4, wherein substep iii.) is carried out by defining a thickness variation using a trigonometric function.

5 7. The method of claim 4, wherein substep iii.) is carried out by defining a thickness variation using a trigonometric function and a step function.

8. The method of claim 4, wherein in step b.), the coordinates are derived using the formula :

10 
$$Z_f = Z_{ctr} \pm \sqrt{(R_{bc} + Thck)^2 - (R_f - R_{ctr})^2}$$

wherein  $R_{bc}$  is a base curve radius,  $Z_{ctr}$  and  $R_{ctr}$  are the coordinates of the center of the base curve,  $Thck$  is the thickness at the point on the front surface for which the coordinate is to be derived.

15 9. The method of claim 4, wherein step b.) further comprises:

- i.) offsetting a base curve by a thickness at a point on a surface for which the coordinates are to be derived;
- ii.) intersecting the offset base curve with a line; and
- iii.) selecting a solution.

20

10. The method of claim 4, wherein step b.) is carried out by approximating locations for the fine mesh points using a three-dimensional cubic spline approximation.

25 11. An ophthalmic lens designed according to the method of claim 1.

12. An ophthalmic lens designed according to the method of claim 2.

13. An ophthalmic lens designed according to the method of claim 3.

30

14. A contact lens designed according to the method of claim 4.

15. A contact lens designed according to the method of claim 7.

5 16. A contact lens designed according to the method of claim 9.

FIG. 1

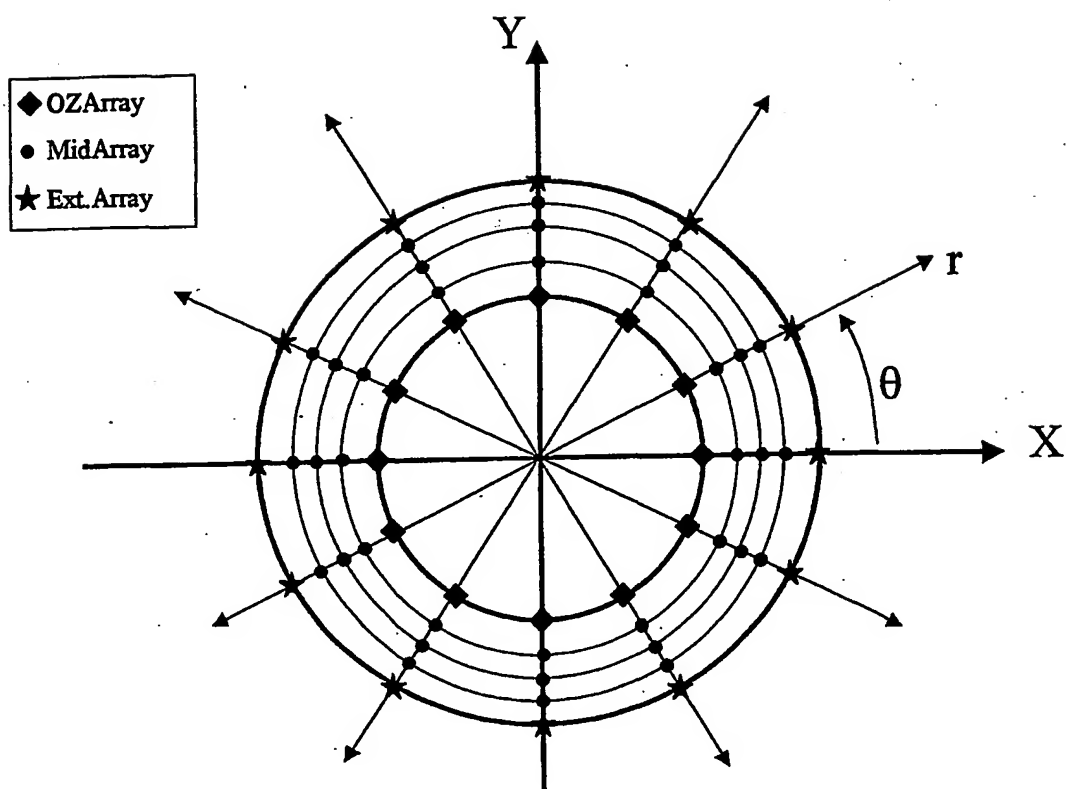


FIG. 2

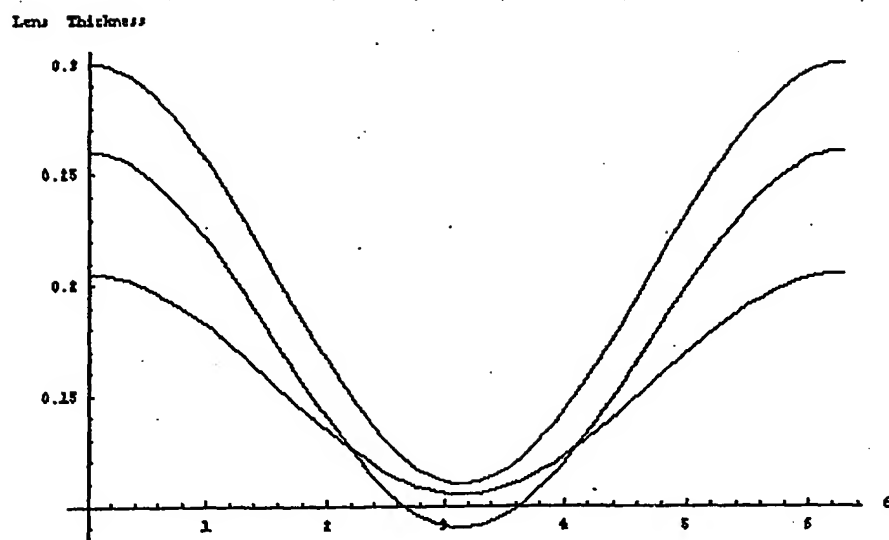
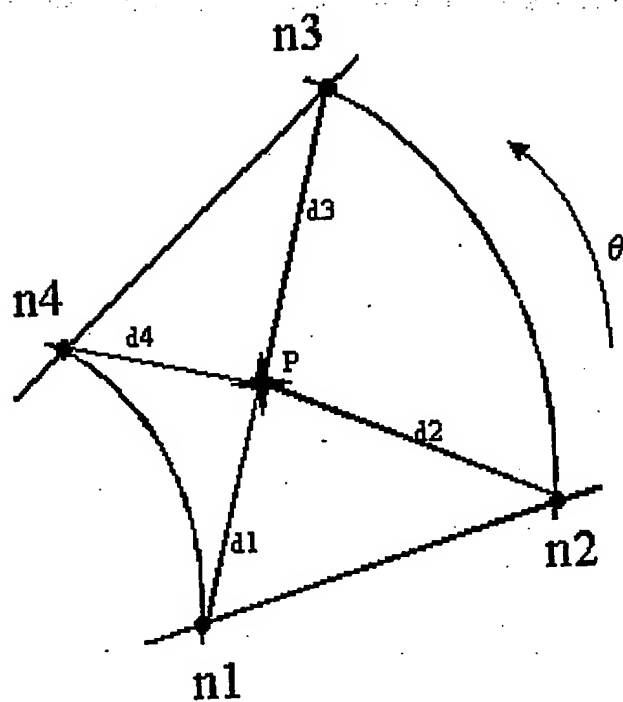


FIG. 3



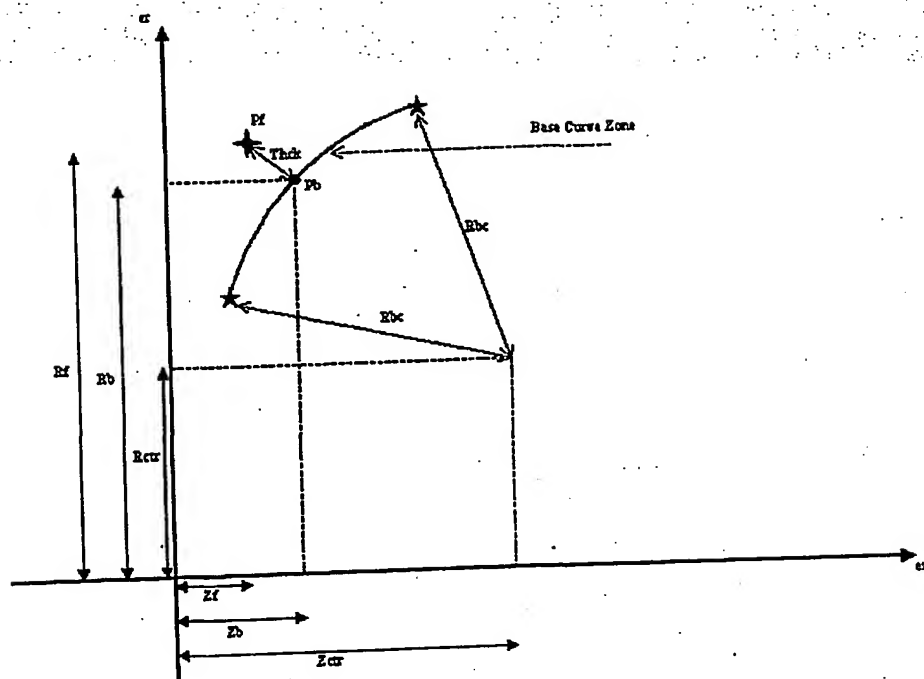


FIG. 4

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 June 2002 (20.06.2002)

(10) International Publication Number  
**WO 02/048779 A3**

PCT

(51) International Patent Classification<sup>7</sup>: **G02C 7/04**

(21) International Application Number: **PCT/US01/47090**

(22) International Filing Date:  
13 November 2001 (13.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/713,461 15 November 2000 (15.11.2000) US

(71) Applicant: **JOHNSON & JOHNSON VISION CARE, INC.** [US/US]; 7500 Centurian Parkway, Suite 100, Jacksonville, FL 32256 (US).

(72) Inventor: **JUBIN, Philippe**; 5407 Stetson Road, Jacksonville, FL 32207 (US).

(74) Agents: **JOHNSON, Philip, S. et al.**; Johnson & Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

(88) Date of publication of the international search report:  
3 January 2003

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **METHOD FOR DESIGNING CONTACT LENSES**

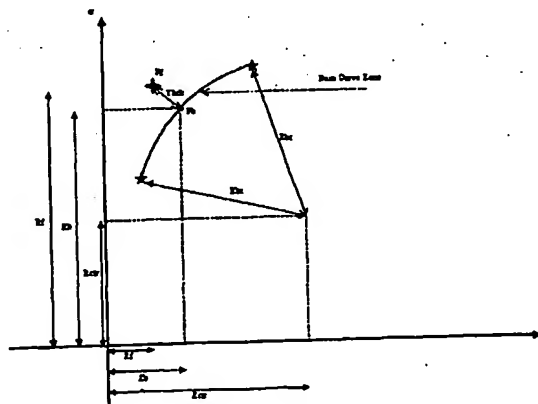

(57) Abstract: The invention provides methods for designing contact lenses in which method the thickness in the lens periphery is precisely controlled.

WO 02/048779 A3

# INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/US 01/47090

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02C7/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 953 098 A (LIEBERMAN DAVID M ET AL) 14 September 1999 (1999-09-14) column 3, line 14 -column 4, line 16 column 10, line 48 -column 12, line 14	1-5
A	US 5 173 723 A (VOLK DONALD A) 22 December 1992 (1992-12-22) abstract column 13, line 28 -column 14, line 61	1-3
A	US 5 452 031 A (DUCHARME CHRISTOPHER A) 19 September 1995 (1995-09-19) column 2, line 53 -column 3, line 58	1,2
A	US 6 082 856 A (DUNN STEPHEN A ET AL) 4 July 2000 (2000-07-04) column 3, line 52 -column 5, line 6	1,2
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

10 July 2002

Date of mailing of the international search report

19/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

CALLEWAERT, H



# INTERNATIONAL SEARCH REPORT

Internat  
Application No  
PCT/US 01/47090

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 58773 A (JOHNSON & JOHNSON VISION CARE) 5 October 2000 (2000-10-05) abstract	1,2
P,A	US 6 305 802 B1 (COLLINS MICHAEL J ET AL) 23 October 2001 (2001-10-23) abstract column 2, line 50 - line 56	1-4

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/US 01/47090

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5953098	A	14-09-1999	US 5880809 A	09-03-1999
			AU 731311 B2	29-03-2001
			AU 2348397 A	01-10-1997
			BR 9708072 A	27-07-1999
			CA 2248624 A1	18-09-1997
			EP 0990191 A1	05-04-2000
			JP 2001502810 T	27-02-2001
			NO 984246 A	16-11-1998
			NZ 332017 A	23-06-2000
			NZ 504006 A	01-02-2002
			PL 328802 A1	15-02-1999
			WO 9734185 A1	18-09-1997
US 5173723	A	22-12-1992	EP 0504393 A1	23-09-1992
			WO 9206400 A1	16-04-1992
US 5452031	A	19-09-1995	AU 678481 B2	29-05-1997
			AU 6767894 A	21-11-1994
			CA 2161890 A1	10-11-1994
			EP 0724742 A1	07-08-1996
			JP 9500973 T	28-01-1997
			WO 9425887 A1	10-11-1994
US 6082856	A	04-07-2000	AU 1810800 A	29-05-2000
			EP 1133710 A1	19-09-2001
			WO 0028368 A1	18-05-2000
WO 0058773	A	05-10-2000	US 6206520 B1	27-03-2001
			AU 3241800 A	16-10-2000
			BR 0005568 A	06-03-2001
			CN 1297538 T	30-05-2001
			EP 1082636 A1	14-03-2001
			WO 0058773 A1	05-10-2000
US 6305802	B1	23-10-2001	AU 6895700 A	05-03-2001
			BR 0013211 A	23-04-2002
			EP 1206722 A1	22-05-2002
			WO 0111418 A1	15-02-2001